

# **PRODUCT SPECIFICATION** **FOR LCD MODULE**

**Revision:** 1.0

**Model No:** LSC0128I08-S-V1

**Module Type:** COG+FPC+B/L+CTP

**APPROVED SIGNATURE**

- Approved Product Specification only
- Approved Product Specification and Samples

| <b><u>Prepared By</u></b> | <b><u>Checked By</u></b> | <b><u>Approved By</u></b> |
|---------------------------|--------------------------|---------------------------|
|                           |                          |                           |

## Contents

目录

|                                          |    |
|------------------------------------------|----|
| 1. General Description .....             | 3  |
| 2. Physical Features .....               | 3  |
| 3. Mechanical Specification .....        | 3  |
| 4. Outline Dimension .....               | 4  |
| 5. Absolute Maximum Ratings .....        | 6  |
| 6. Electrical Characteristics .....      | 6  |
| 7. Module Function Description .....     | 7  |
| 8. Electro-Optical Characteristics ..... | 10 |
| 9. Records Of Version .....              | 13 |

# 1. General Description

LSC0128I08-S-V1 is a transmissive type a-Si TFT-LCD (amorphous silicon thin film transistor liquid crystal display) module, which is composed of a TFT-LCD panel, a driver circuit and a backlight unit. The panel size is 1.28 inch and the resolution is 240(RGB)\*240, the panel can display up to 262k colors.


## 2. Physical Features

|                                            |                                      |
|--------------------------------------------|--------------------------------------|
| Display Mode                               | TFT-LCD Module                       |
|                                            | Active matrix TFT, Transmissive type |
| Display Format                             | Graphic 240(RGB)×240 Dot-matrix      |
| Input Data                                 | 4-line serial interface              |
| Viewing Direction<br>(Grayscale Inversion) | Free (IPS)                           |
| Drive                                      | ST77912                              |

## 3. Mechanical Specification

| Item                | Specification | Unit  |
|---------------------|---------------|-------|
| Module size (H×V×D) | 44 ×44 ×2.88  | mm    |
| Number of dots      | 240(RGB) ×240 | pixel |
| Active area (H×V)   | 32.4×32.4     | mm    |

## 4. Outline Dimensi LCM

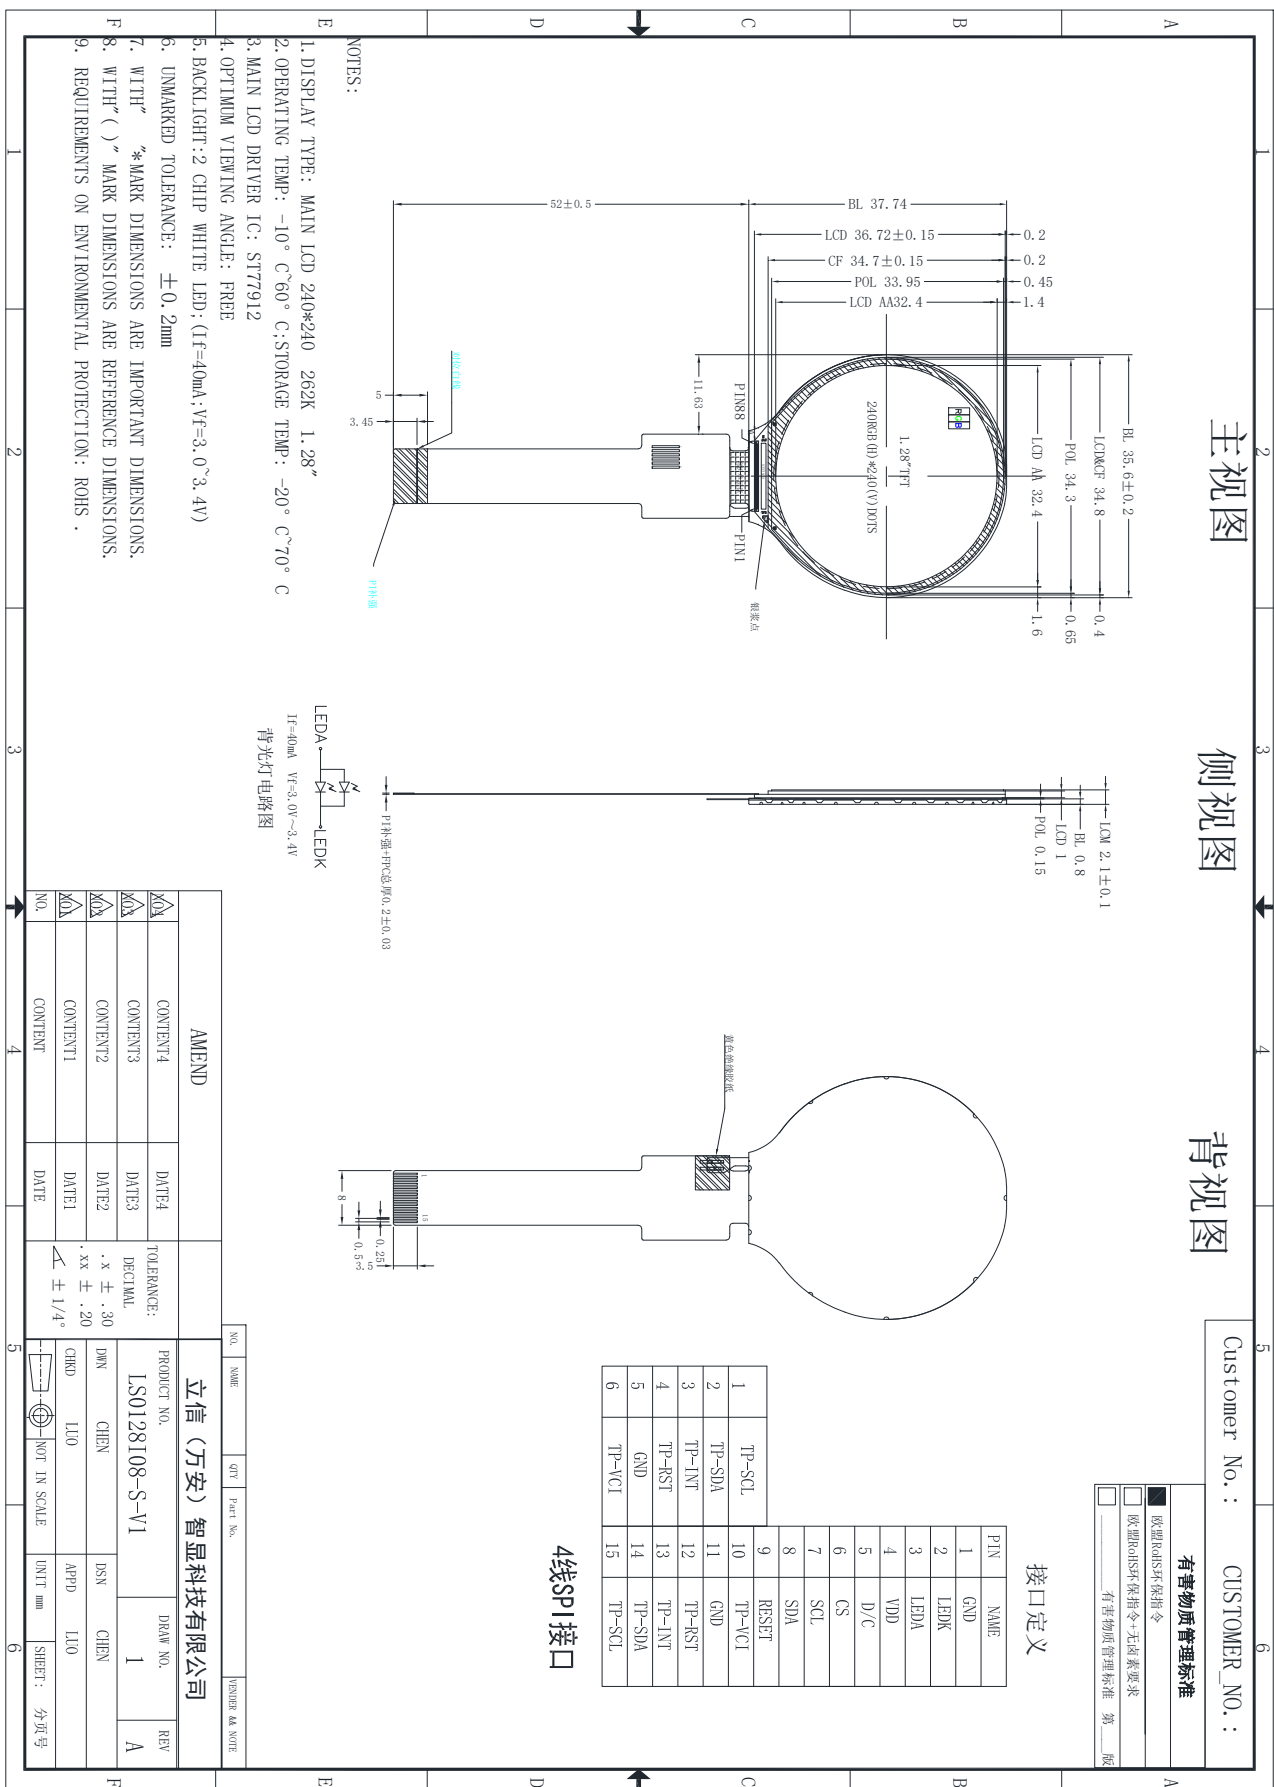

|         |            |
|---------|------------|
| UNIT mm | SHEET: 分頁号 |
|---------|------------|

## 5. Absolute Maximum Ratings


| Item                  | Symbol | Min  | Max | Unit | Remark         |
|-----------------------|--------|------|-----|------|----------------|
| Supply voltage        | VCC    | -0.3 | 4.6 | V    | Note1<br>Note2 |
| Supply voltage        | IOVCC  | -0.3 | 4.6 | V    |                |
| Operating temperature | TOPR   | -10  | 60  | °C   |                |
| Storage temperature   | TSTR   | -20  | 70  | °C   |                |

## 6. Electrical Characteristics

| Item           |         | Symbol | Rating    |     |           | Unit | Remark |
|----------------|---------|--------|-----------|-----|-----------|------|--------|
|                |         |        | Min       | Typ | Max       |      |        |
| Supply voltage |         | VCC    | 2.65      | 2.8 | 3.3       | V    | Note1  |
| Supply voltage |         | IOVCC  | 1.65      | 1.8 | 3.3       | V    |        |
| Input Voltage  | L level | VIL    | 0         | --- | 0.3*IOVCC | V    |        |
|                | H level | VIH    | 0.7*IOVCC | --- | IOVCC     | V    |        |

## 7. Module Function Description

### 7- 1. Block Diagram Of LCM

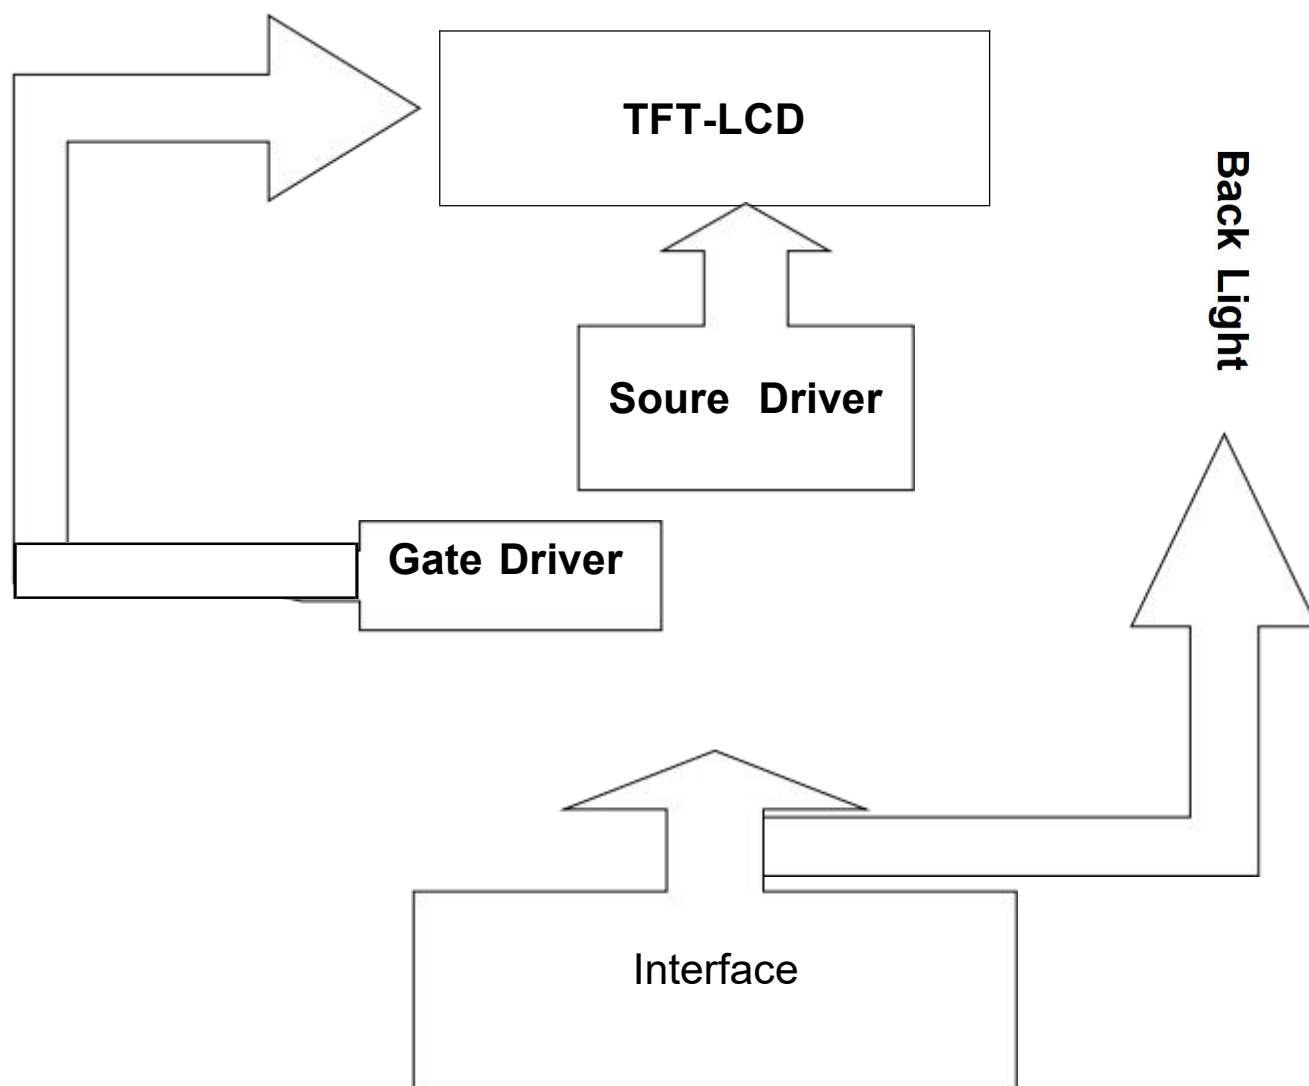


## 7-2. Pin Description

| PIN NO. | Symbol | I/O | Description                     |
|---------|--------|-----|---------------------------------|
| 1       | GND    | P   | Ground                          |
| 2       | LEDK   | P   | Power for LED backlight cathode |
| 3       | LEDA   | O   | Power for LED backlight anode   |
| 4       | VDD    | I/O | power supply                    |
| 5       | D/C    | I   | Command and Data select pin     |
| 6       | CS     | I   | Chip select pin                 |
| 7       | SCL    | I   | Serial clock pin                |
| 8       | SDA    | I   | Serial data input/output PIN    |
| 9       | RESET  | P   | Reset pin.                      |
| 10      | TP_VCI | P   | TP power supply                 |
| 11      | GND    | P   | Ground                          |
| 12      | TP_RST | P   | Reset Pin for TP                |
| 13      | TP_INT | P   | Interrupt signal for TP         |
| 14      | TP_SDA | P   | SDA pin for TP                  |
| 15      | TP_SCL | P   | SCL pin for TP                  |

## 7-3 Timing Characteristics

### 7.4.3 Serial Interface Characteristics (4-line serial):

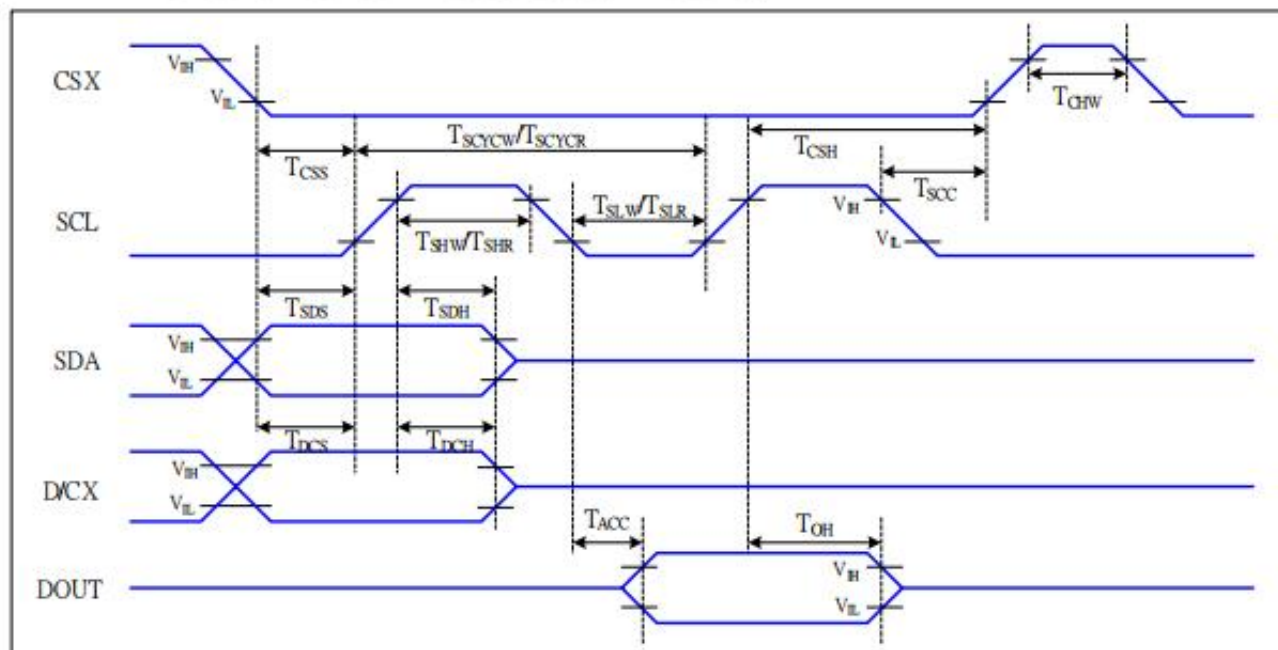

**Figure 5 4-line serial Interface Timing Characteristics**

VDDI=1.65 to 3.3V, VDD=2.65 to 3.3V, GND=RGND=0V, Ta=25°C

| Signal    | Symbol      | Parameter                      | MIN | MAX | Unit | Description               |
|-----------|-------------|--------------------------------|-----|-----|------|---------------------------|
| CSX       | $T_{CSS}$   | Chip select setup time (write) | 15  |     | ns   |                           |
|           | $T_{CSH}$   | Chip select hold time (write)  | 15  |     | ns   |                           |
|           | $T_{CSS}$   | Chip select setup time (read)  | 60  |     | ns   |                           |
|           | $T_{SCC}$   | Chip select hold time (read)   | 65  |     | ns   |                           |
|           | $T_{CHW}$   | Chip select "H" pulse width    | 40  |     | ns   |                           |
| SCL       | $T_{SCYCW}$ | Serial clock cycle (Write)     | 16  |     | ns   | -write command & data ram |
|           | $T_{SHW}$   | SCL "H" pulse width (Write)    | 7   |     | ns   |                           |
|           | $T_{SLW}$   | SCL "L" pulse width (Write)    | 7   |     | ns   |                           |
|           | $T_{SCYCR}$ | Serial clock cycle (Read)      | 150 |     | ns   | -read command & data ram  |
|           | $T_{SHR}$   | SCL "H" pulse width (Read)     | 60  |     | ns   |                           |
|           | $T_{SLR}$   | SCL "L" pulse width (Read)     | 60  |     | ns   |                           |
| D/CX      | $T_{DCS}$   | D/CX setup time                | 7   |     | ns   |                           |
|           | $T_{DCH}$   | D/CX hold time                 | 7   |     | ns   |                           |
| SDA (DIN) | $T_{SDS}$   | Data setup time                | 7   |     | ns   |                           |
|           | $T_{SDH}$   | Data hold time                 | 7   |     | ns   |                           |
| DOUT      | $T_{ACC}$   | Access time                    | 10  | 50  | ns   | For maximum CL=30pF       |
|           | $T_{OH}$    | Output disable time            | 15  | 50  | ns   | For minimum CL=8pF        |

**Table 6 4-line serial Interface Characteristics**

## 8. Electro-Optical Characteristics

| Item                         |            | Symbol | Condition                 | Min. | Typ. | Max. | Unit | Remark |
|------------------------------|------------|--------|---------------------------|------|------|------|------|--------|
| Response time                |            | Tr +Tf | $\theta_x = \theta_y = 0$ | ---  | 30   | 40   | ms   | Note 1 |
| Contrast Ratio               |            | CR     |                           | 600  | 800  | ---  | ---  | Note 2 |
| Transmittance                |            | T%     |                           | 3.0  | 3.8  | ---  | %    |        |
| Color Chromaticity (CIE1931) | White      | W x    | $\theta_x = \theta_y = 0$ | ---  | TBD  | ---  | ---  |        |
|                              |            | W y    |                           | ---  | TBD  | ---  | ---  |        |
| Viewing angle                | $\theta_T$ |        | CR > 10                   | 80   | ---  | ---  | Deg. | Note 3 |
|                              | $\theta_B$ |        |                           | 80   | ---  | ---  |      |        |
|                              | $\theta_L$ |        |                           | 80   | ---  | ---  |      |        |
|                              | $\theta_R$ |        |                           | 80   | ---  | ---  |      |        |

Note1. Measuring Condition

- (1) Measuring surrounding: dark room
- (2) Ambient temperature: Ta=25℃
- (3) 15min. warm-up time

Note2. Response time is the time required for the display to transition from Black to White (Rise Time, Tr) and from White to Black (Decay Time, Tf). The measurement instrument is DMS-803. For more information, please refer to FIG 1 and FIG 2.


Note3. Contrast Ratio (CR) is defined mathematically as below. Measured at the center point of panel by DMS-803, please refer to FIG 1

$$\text{Contrast Ratio} = \frac{\text{Surface Luminance with all white pixels}}{\text{Surface Luminance with all black pixels}}$$

Note4. Viewing angle is the angle at which the contrast ratio is greater than 10(CR≥10:1). The measurement instrument is DMS-803. For more information, please refer to FIG 1 and FIG 3.


Note5. CIE (x, y) chromaticity for CF only, measured with Olympus MHL-450 under C light.

**FIG. 1 DMS-803 Measurement Set-Up**

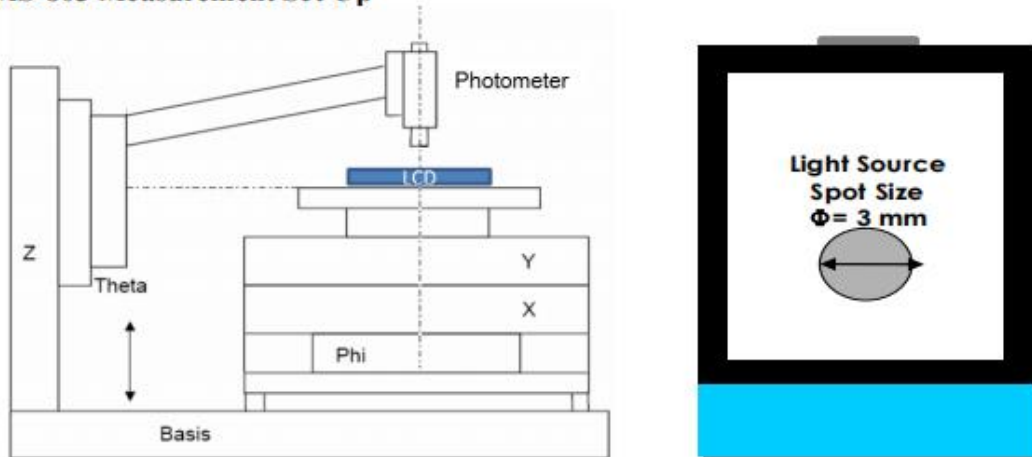


**FIG. 2 The definition of Response Time**


The response time is defined as the following figure and shall be measured by switching the input signal for “black” and “white”. This definition is valid for a normally black display. For a normally white display the opposite definition applies.

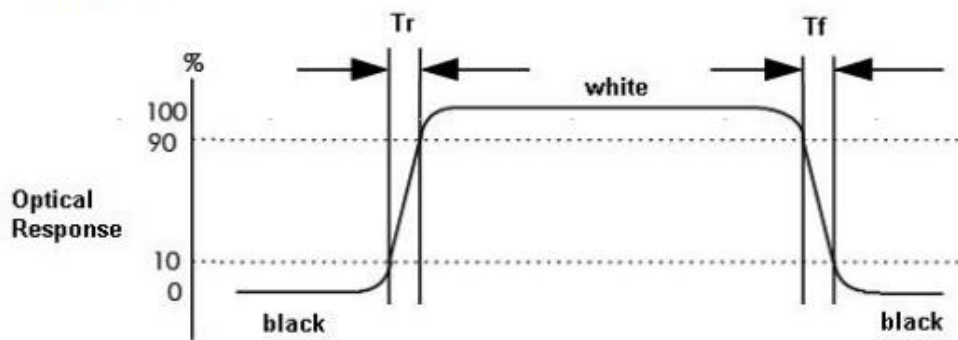

**FIG. 3 The definition of viewing angle**

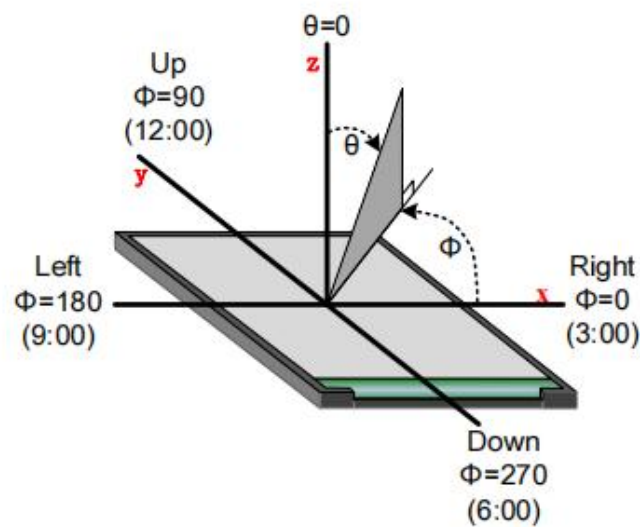

**Note(4) Backlight circuit**

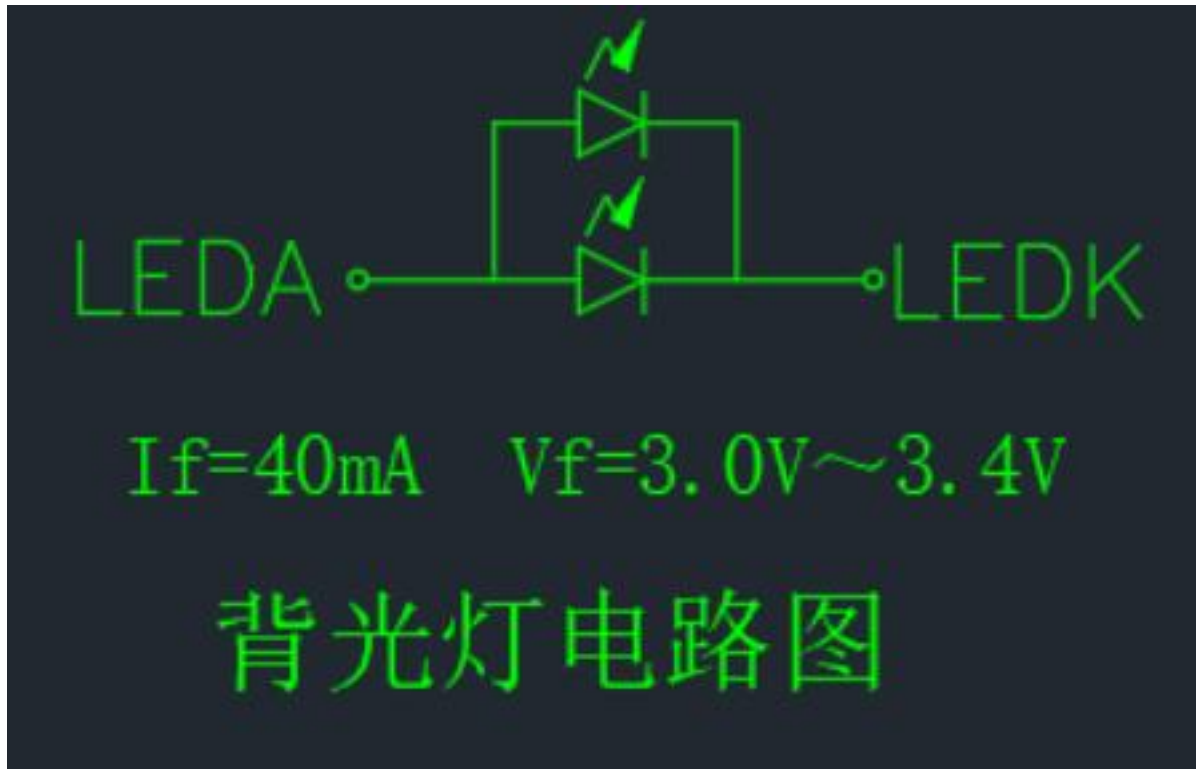

## 9.Records Of Version

| Version | Revise Date | Page | Content      |
|---------|-------------|------|--------------|
| 00      |             | ALL  | New released |
|         |             |      |              |
|         |             |      |              |
|         |             |      |              |
|         |             |      |              |
|         |             |      |              |
|         |             |      |              |
|         |             |      |              |
|         |             |      |              |
|         |             |      |              |
|         |             |      |              |
|         |             |      |              |
|         |             |      |              |