

PRODUCT SPECIFICATION **FOR LCD MODULE**

Revision: 1.0

Model No: LSC0128I09-S-V1

Module Type: COG+FPC+B/L+CTP

APPROVED SIGNATURE

- Approved Product Specification only
- Approved Product Specification and Samples

<u>Prepared By</u>	<u>Checked By</u>	<u>Approved By</u>

Contents

目录

1. General Description	3
2. Physical Features	3
3. Mechanical Specification	3
4. Outline Dimension	4
5. Absolute Maximum Ratings	6
6. Electrical Characteristics	6
7. Module Function Description	7
8. Electro-Optical Characteristics	10
9. Records Of Version	13

1. General Description

LSC0128I09-S-V1 is a transmissive type a-Si TFT-LCD (amorphous silicon thin film transistor liquid crystal display) module, which is composed of a TFT-LCD panel, a driver circuit and a backlight unit. The panel size is 1.28 inch and the resolution is 240(RGB)*240, the panel can display up to 262k colors.


2. Physical Features


Display Mode	TFT-LCD Module
	Active matrix TFT, Transmissive type
Display Format	Graphic 240(RGB)×240 Dot-matrix
Input Data	4-line serial interface
Viewing Direction (Grayscale Inversion)	Free (IPS)
Drive	ST77912

3. Mechanical Specification

Item	Specification	Unit
Module size (H×V×D)	54 ×54 ×2.88	mm
Number of dots	240(RGB) ×240	pixel
Active area (H×V)	32.4×32.4	mm

4. Outline Dimensi LCM

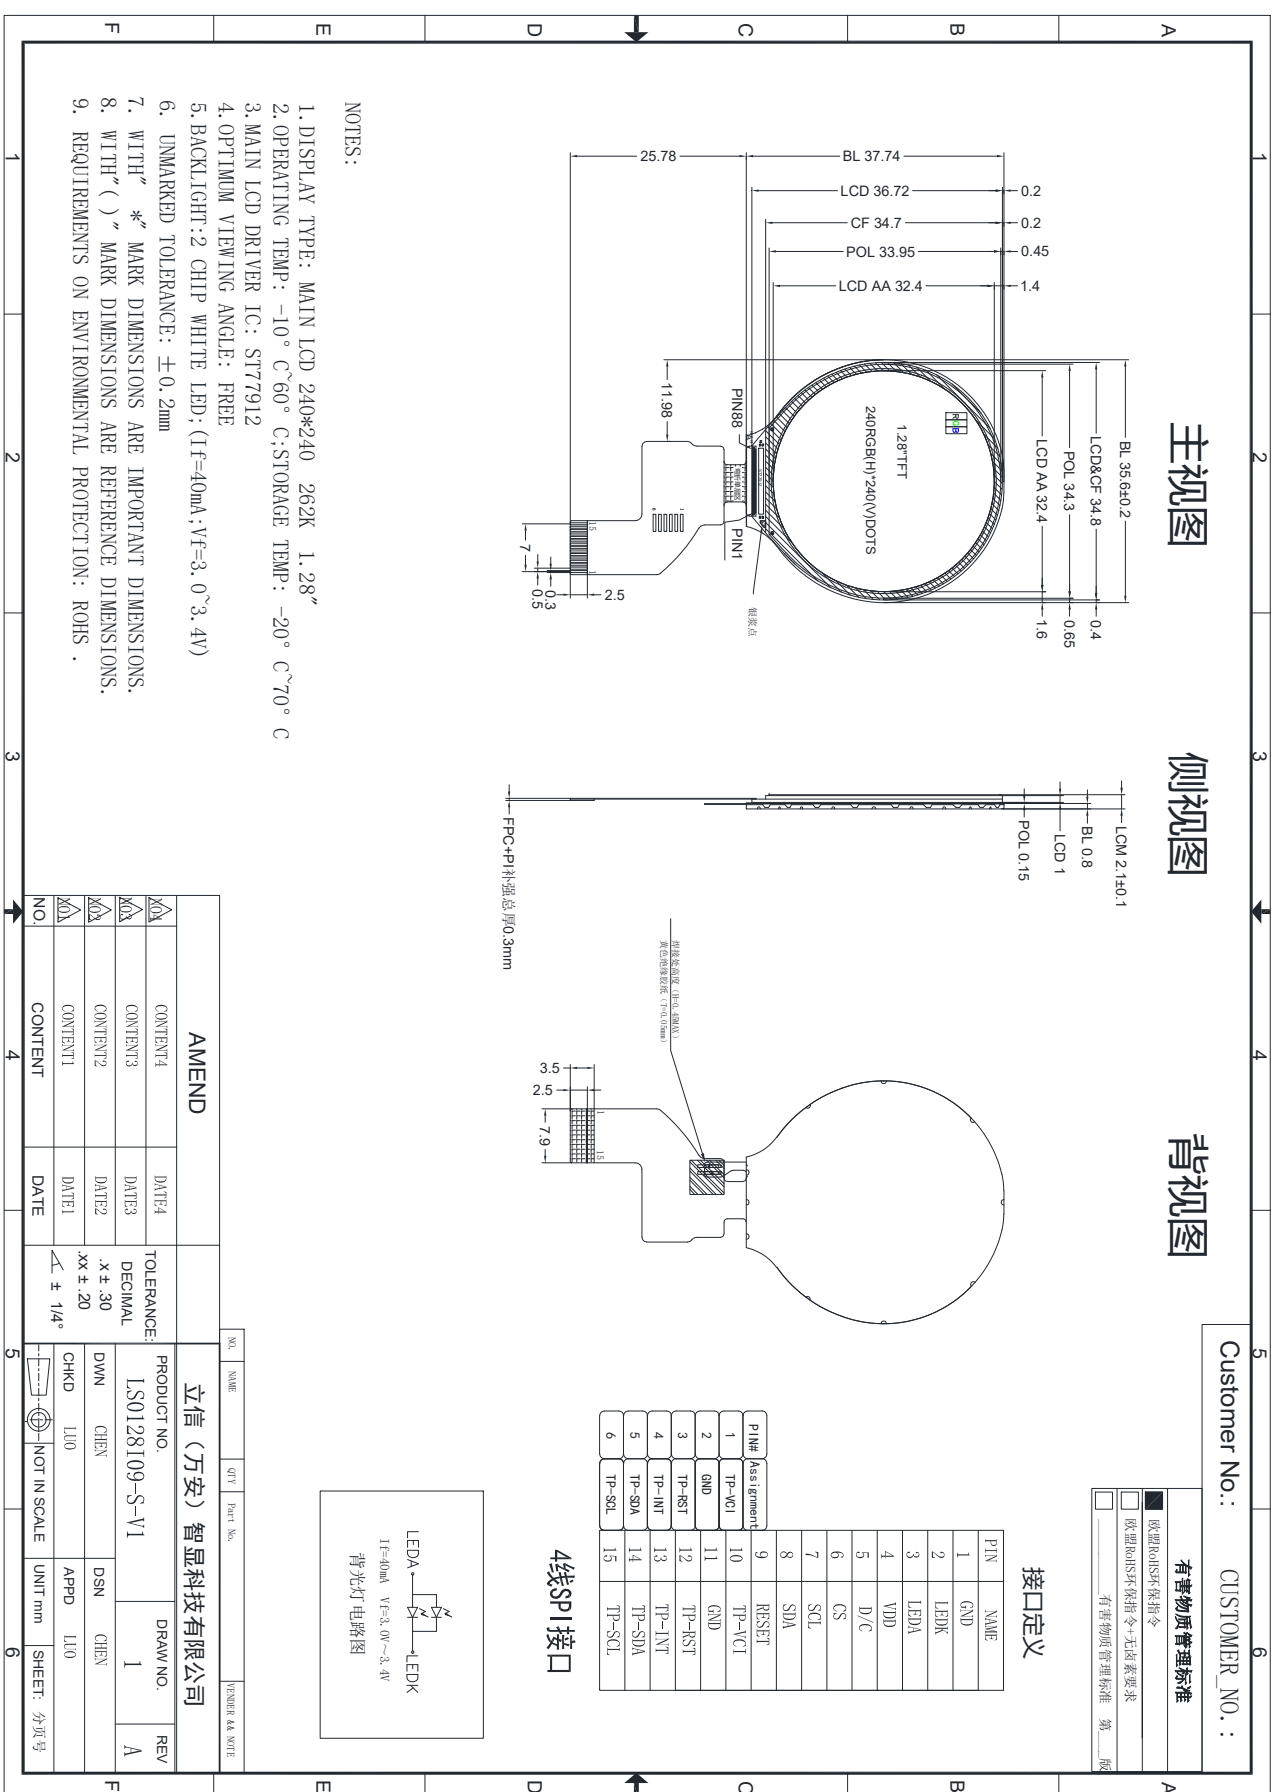

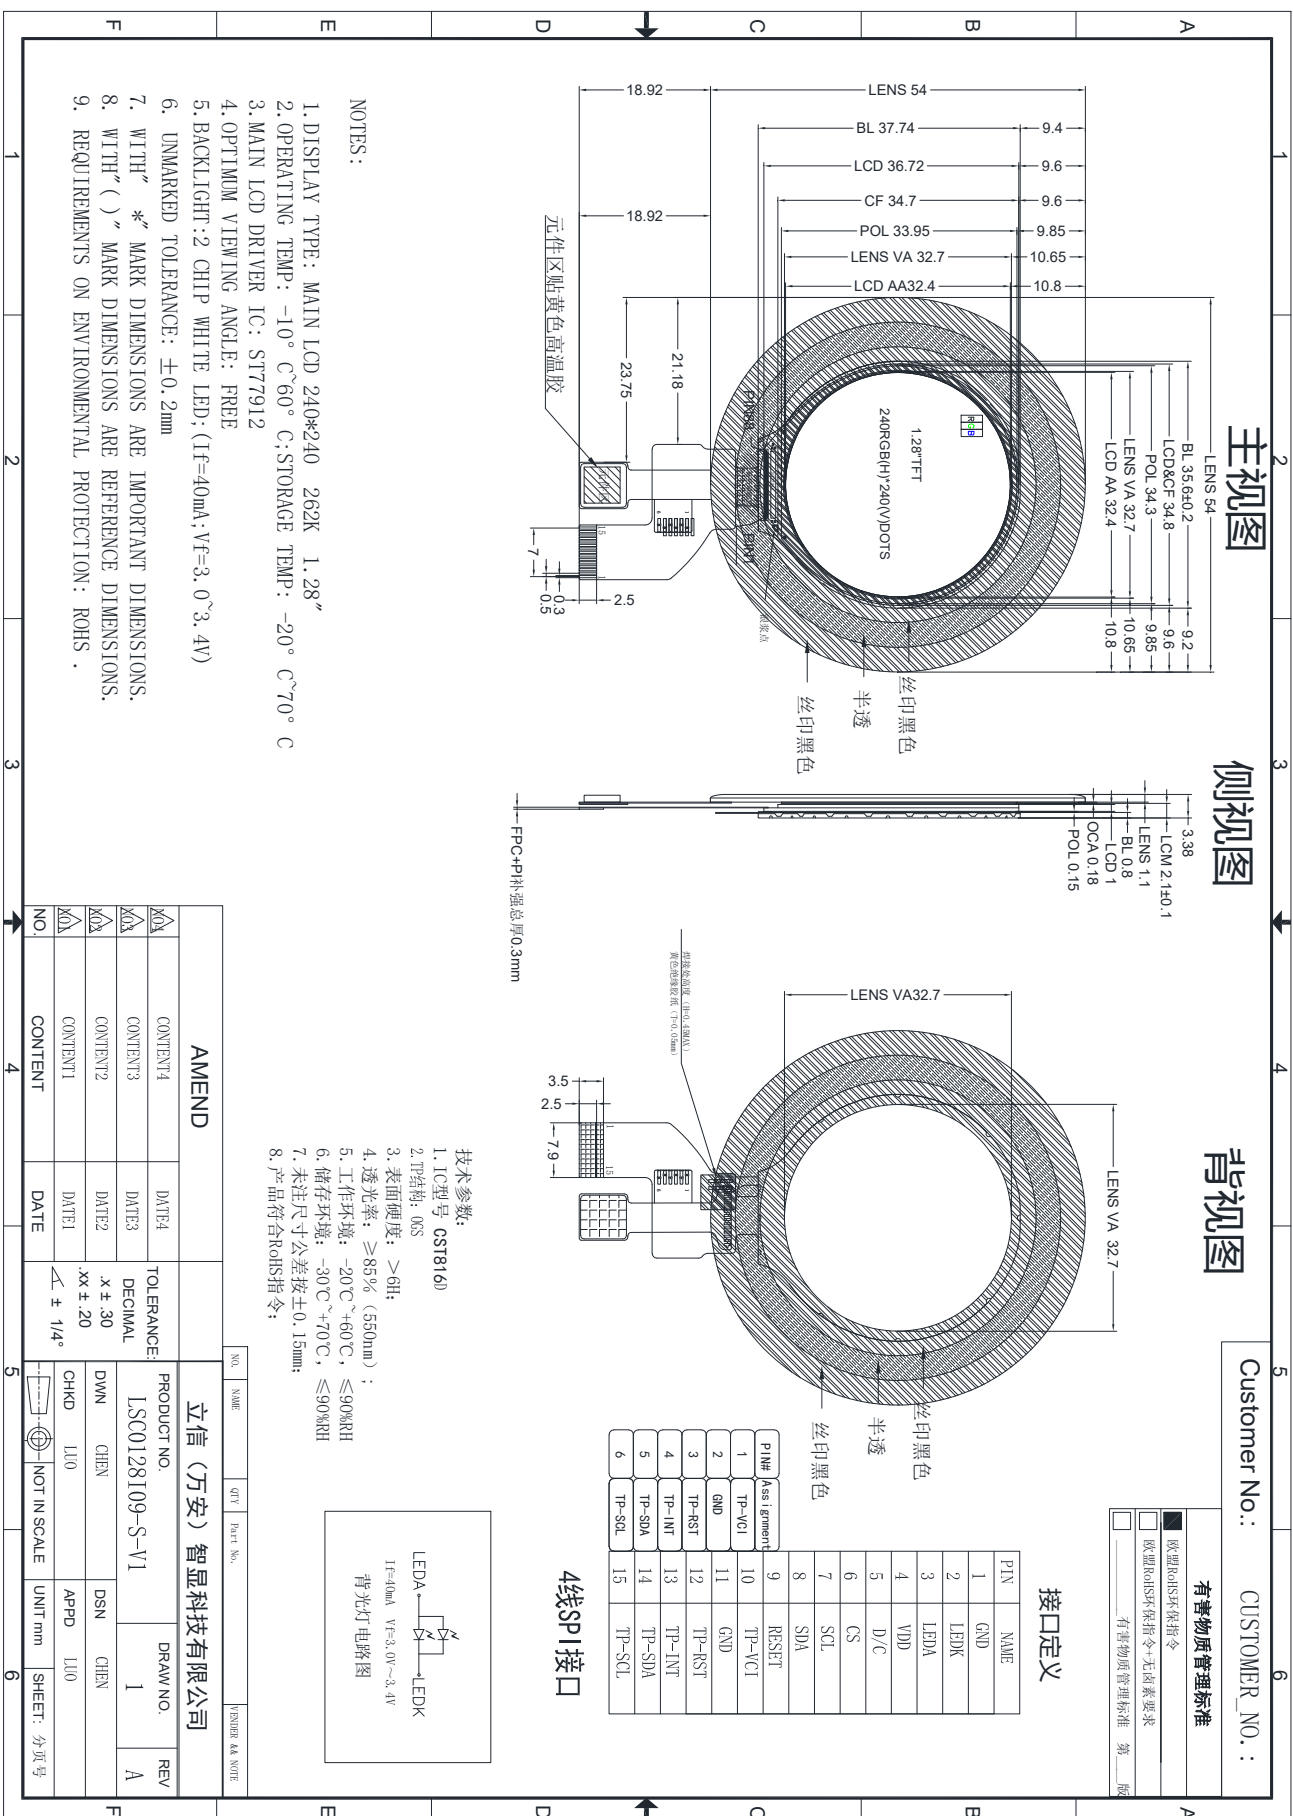

5. Absolute Maximum Ratings


Item	Symbol	Min	Max	Unit	Remark
Supply voltage	VCC	-0.3	4.6	V	Note1 Note2
Supply voltage	IOVCC	-0.3	4.6	V	
Operating temperature	TOPR	-10	60	°C	
Storage temperature	TSTR	-20	70	°C	

6. Electrical Characteristics

Item		Symbol	Rating			Unit	Remark
			Min	Typ	Max		
Supply voltage		VCC	2.65	2.8	3.3	V	Note1
Supply voltage		IOVCC	1.65	1.8	3.3	V	
Input Voltage	L level	VIL	0	---	0.3*IOVCC	V	
	H level	VIH	0.7*IOVCC	---	IOVCC	V	

7. Module Function Description

7-1. Block Diagram Of LCM

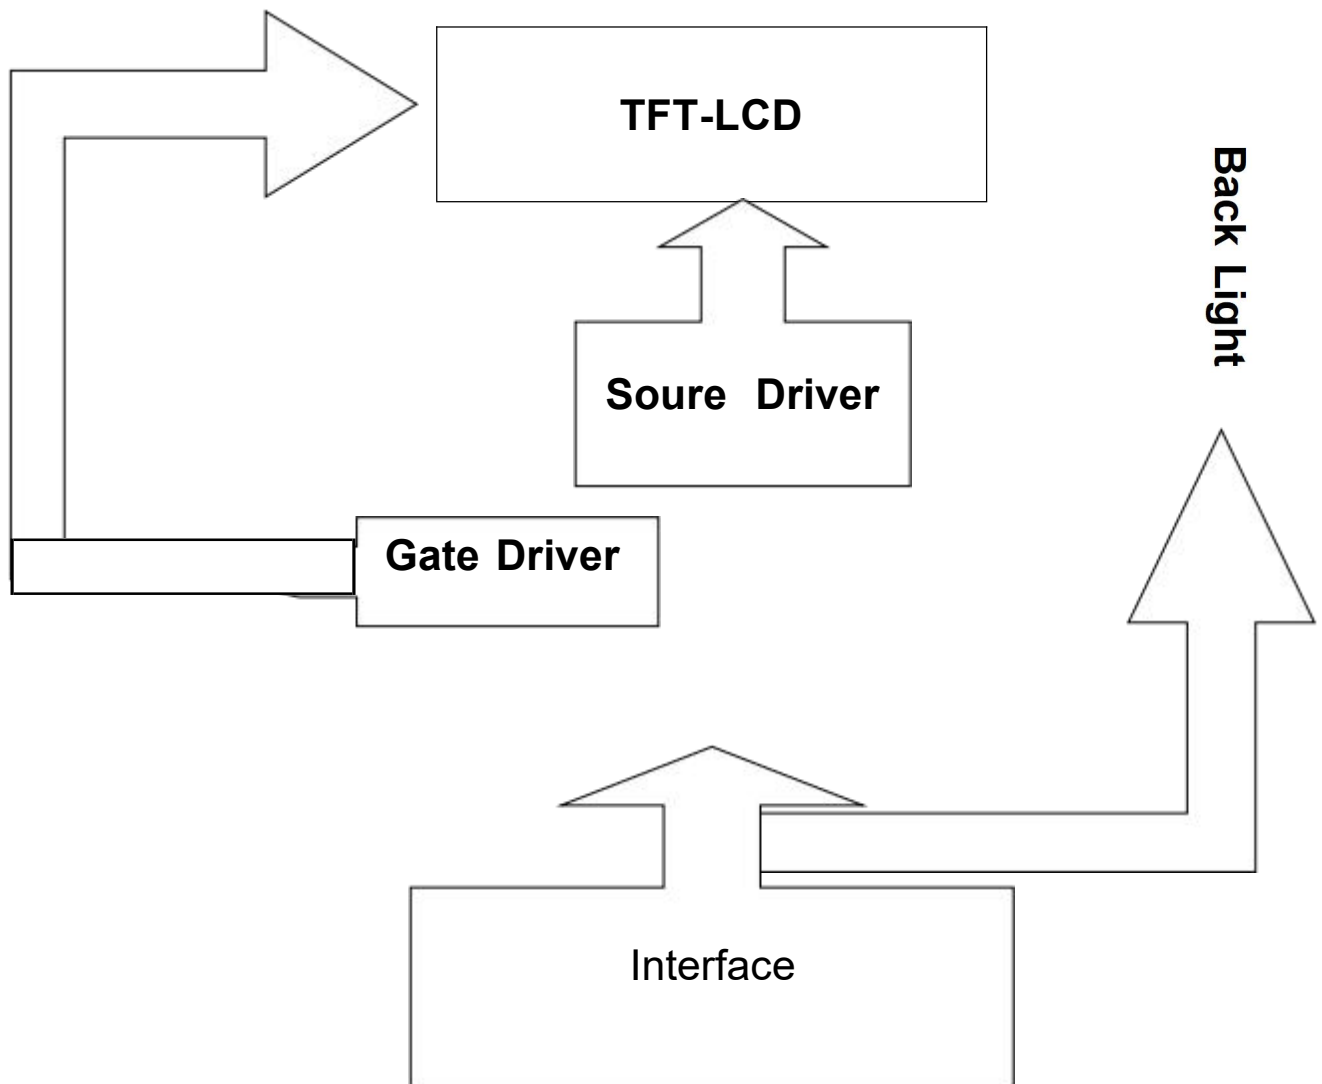

7-2. Pin Description

PIN NO.	Symbol	I/O	Description
1	GND	P	Ground
2	LEDK	P	Power for LED backlight cathode
3	LEDA	O	Power for LED backlight anode
4	VDD	I/O	power supply
5	D/C	I	Command and Data select pin
6	CS	I	Chip select pin
7	SCL	I	Serial clock pin
8	SDA	I	Serial data input/output PIN
9	RESET	P	Reset pin.
10	TP_VCI	P	TP power supply
11	GND	P	Ground
12	TP_RST	P	Reset Pin for TP
13	TP_INT	P	Interrupt signal for TP
14	TP_SDA	P	SDA pin for TP
15	TP_SCL	P	SCL pin for TP

7-3 Timing Characteristics

7.4.3 Serial Interface Characteristics (4-line serial):

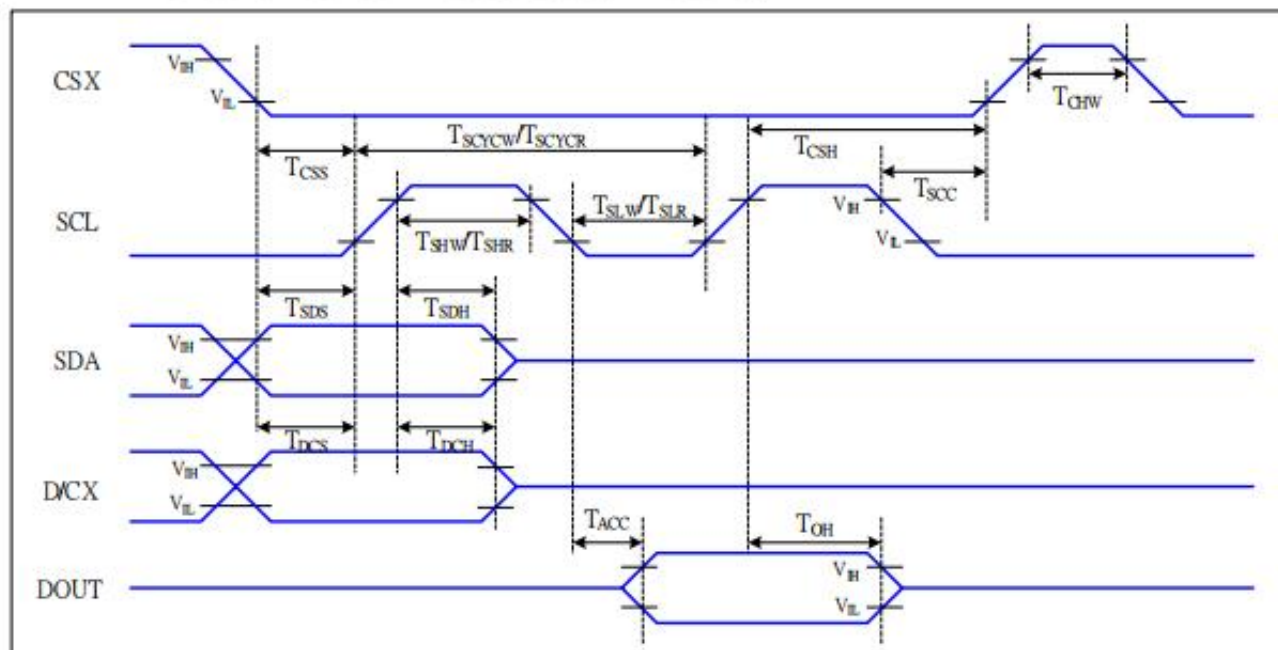


Figure 5 4-line serial Interface Timing Characteristics

VDDI=1.65 to 3.3V, VDD=2.65 to 3.3V, GND=RGND=0V, Ta=25°C

Signal	Symbol	Parameter	MIN	MAX	Unit	Description
CSX	T_{CSS}	Chip select setup time (write)	15		ns	
	T_{CSH}	Chip select hold time (write)	15		ns	
	T_{CSS}	Chip select setup time (read)	60		ns	
	T_{SCC}	Chip select hold time (read)	65		ns	
	T_{CHW}	Chip select "H" pulse width	40		ns	
SCL	T_{SCYCW}	Serial clock cycle (Write)	16		ns	-write command & data ram
	T_{SHW}	SCL "H" pulse width (Write)	7		ns	
	T_{SLW}	SCL "L" pulse width (Write)	7		ns	
	T_{SCYCR}	Serial clock cycle (Read)	150		ns	-read command & data ram
	T_{SHR}	SCL "H" pulse width (Read)	60		ns	
	T_{SLR}	SCL "L" pulse width (Read)	60		ns	
D/CX	T_{DCS}	D/CX setup time	7		ns	
	T_{DCH}	D/CX hold time	7		ns	
SDA (DIN)	T_{SDS}	Data setup time	7		ns	
	T_{SDH}	Data hold time	7		ns	
DOUT	T_{ACC}	Access time	10	50	ns	For maximum CL=30pF
	T_{OH}	Output disable time	15	50	ns	For minimum CL=8pF

Table 6 4-line serial Interface Characteristics

8. Electro-Optical Characteristics

Item		Symbol	Condition	Min.	Typ.	Max.	Unit	Remark
Response time		Tr +Tf	$\theta_x = \theta_y = 0$	---	30	40	ms	Note 1
Contrast Ratio		CR		600	800	---	---	Note 2
Transmittance		T%		3.0	3.8	---	%	
Color Chromaticity (CIE1931)	White	W x	$\theta_x = \theta_y = 0$	---	TBD	---	---	
		W y		---	TBD	---	---	
Viewing angle	θ_T		CR > 10	80	---	---	Deg.	Note 3
	θ_B			80	---	---		
	θ_L			80	---	---		
	θ_R			80	---	---		

Note1. Measuring Condition

- (1) Measuring surrounding: dark room
- (2) Ambient temperature: Ta=25℃
- (3) 15min. warm-up time

Note2. Response time is the time required for the display to transition from Black to White (Rise Time, Tr) and from White to Black (Decay Time, Tf). The measurement instrument is DMS-803. For more information, please refer to FIG 1 and FIG 2.

Note3. Contrast Ratio (CR) is defined mathematically as below. Measured at the center point of panel by DMS-803, please refer to FIG 1

$$\text{Contrast Ratio} = \frac{\text{Surface Luminance with all white pixels}}{\text{Surface Luminance with all black pixels}}$$

Note4. Viewing angle is the angle at which the contrast ratio is greater than 10(CR≥10:1). The measurement instrument is DMS-803. For more information, please refer to FIG 1 and FIG 3.

Note5. CIE (x, y) chromaticity for CF only, measured with Olympus MHL-450 under C light.

FIG. 1 DMS-803 Measurement Set-Up

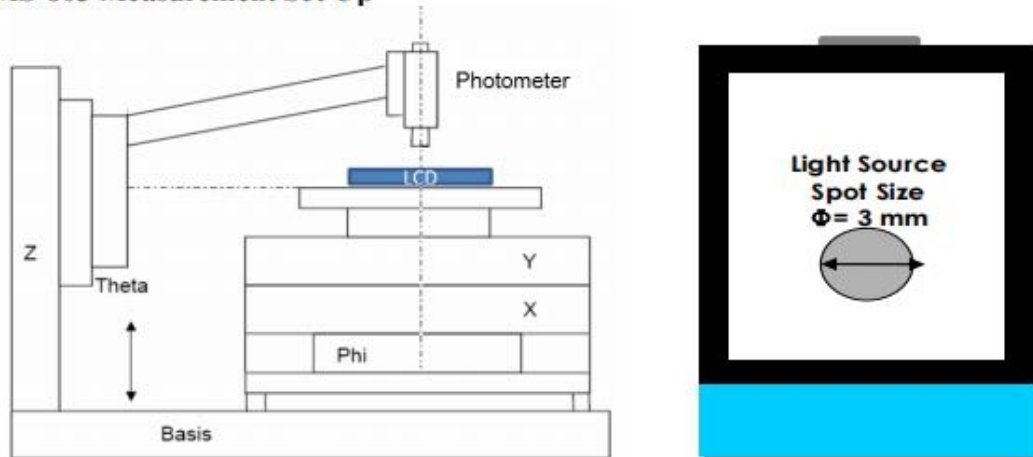


FIG. 2 The definition of Response Time

The response time is defined as the following figure and shall be measured by switching the input signal for “black” and “white”. This definition is valid for a normally black display. For a normally white display the opposite definition applies.



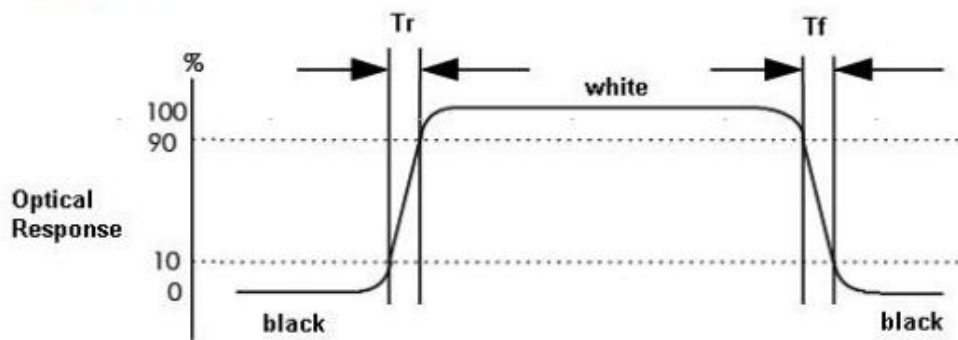


FIG. 3 The definition of viewing angle

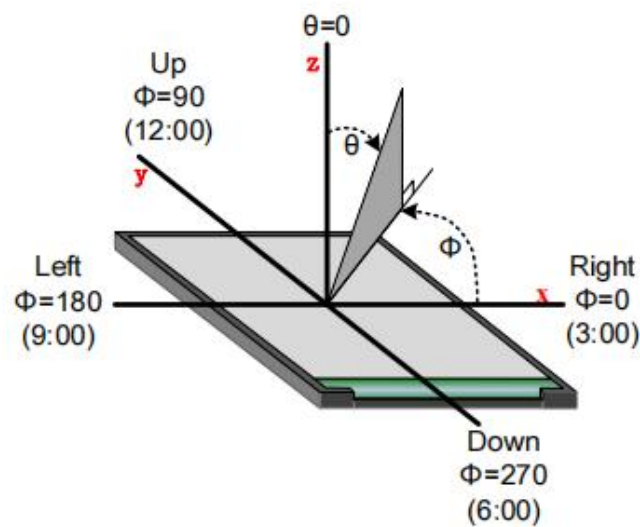

Note(4) Backlight circuit

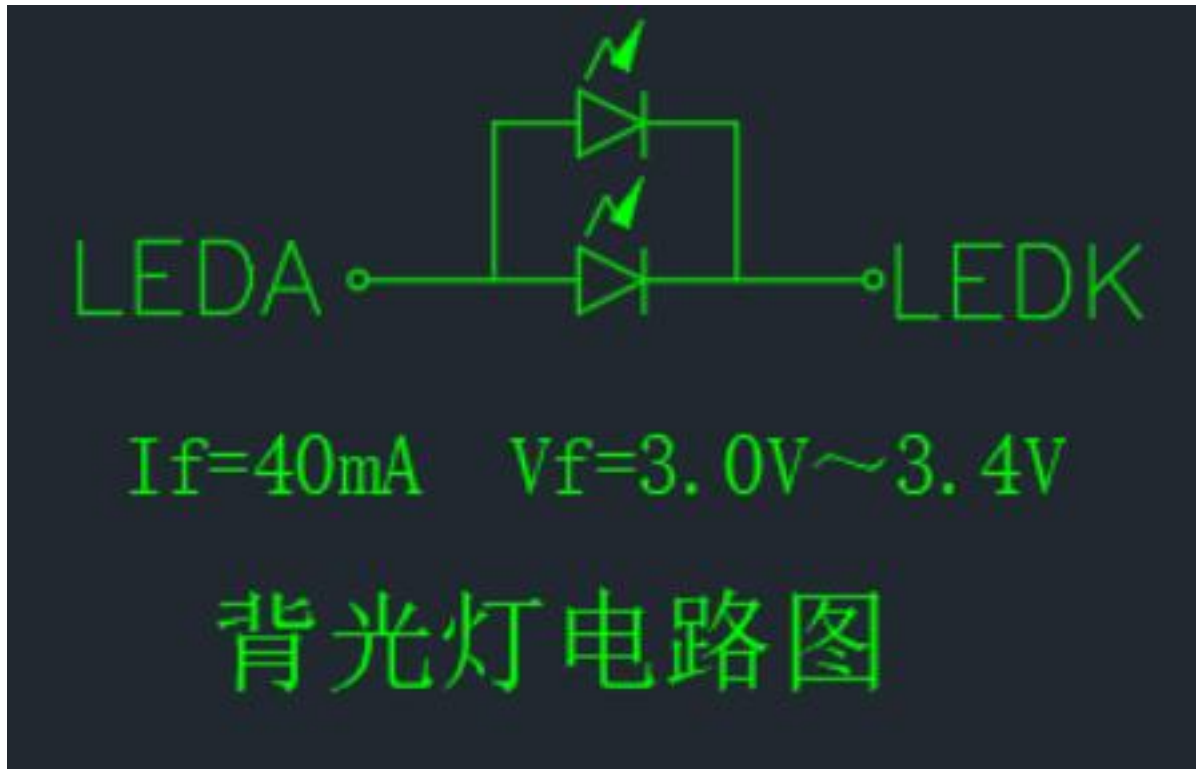

9.Records Of Version

Version	Revise Date	Page	Content
00	2025-7-21	ALL	New released