

PRODUCT SPECIFICATION **FOR LCD MODULE**

Revision: 1.0

Model No: LS013I06-S-V1

Module Type: COG+FPC+B/L

APPROVED SIGNATURE

- ☒ Approved Product Specification only
- ☐ Approved Product Specification and Samples

<u>Prepared By</u>	<u>Checked By</u>	<u>Approved By</u>

Contents

目录

1. General Description	3
2. Physical Features	3
3. Mechanical Specification	3
4. Outline Dimension	4
5. Absolute Maximum Ratings	5
6. Electrical Characteristics	5
7. Module Function Description	6
8. Electro-Optical Characteristics	10
9. Inspection Standards	13
10. Records Of Version	19

1. General Description

LS013I06-S-V1 is a transmissive type a-Si TFT-LCD (amorphous silicon thin film transistor liquid crystal display) module, which is composed of a TFT-LCD panel, a driver circuit and a backlight unit. The panel size is 1.3 inch and the resolution is 240(RGB)*240, the panel can display up to 262k colors.

2. Physical Features

Display Mode	TFT-LCD Module
	Active matrix TFT, Transmissive type
Display Format	Graphic 240(RGB)×240 Dot-matrix
Input Data	SPI
Viewing Direction (Grayscale Inversion)	IPS
Drive	ST7789P3

3. Mechanical Specification

Item	Specification	Unit
Module size (H×V×D)	26.17 ×29.22×2.13	mm
Number of dots	240(RGB) ×240	pixel
Active area (H×V)	23.4×23.4	mm



5. Absolute Maximum Ratings

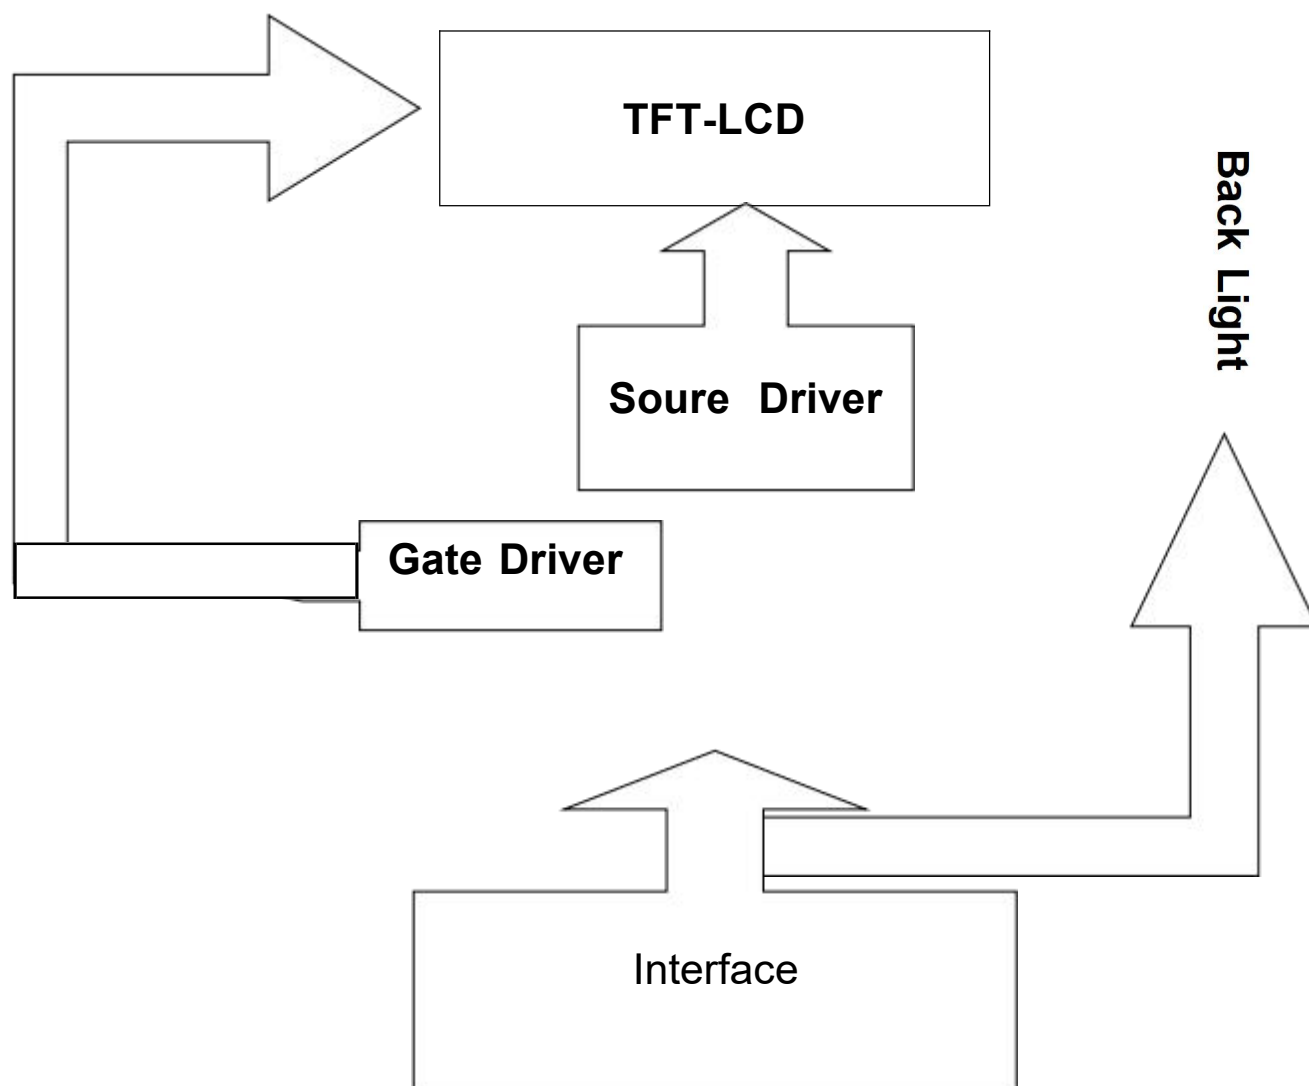
Item	Symbol	Min	Max	Unit	Remark
Supply voltage	VCC	-0.3	4.6	V	Note1 Note2
Supply voltage	IOVCC	-0.3	4.0	V	
Operating temperature	TOPR	-20	70	°C	
Storage temperature	TSTR	-30	80	°C	

6. Electrical Characteristics

Item		Symbol	Rating			Unit	Remark
			Min	Typ	Max		
Supply voltage		VCC	2.4	2.8	3.3	V	Note1
Supply voltage		IOVCC	1.65	1.8	3.3	V	
Input Voltage	L level	VIL	0	---	0.3*IOVCC	V	
	H level	VIH	0.7*IOVCC	---	IOVCC	V	

7. Module Function Description

7- 1. Block Diagram Of LCM



7-2. Pin Description

PIN NO.	Symbol	I/O	Description
1	LED A	P	Back light anode +
2	LED A	P	Back light anode +
3	LED K	P	Back light cathode -
4	LED K	P	Back light cathode -
5	GND	P	Ground
6	CS	I	Chip select pin
7	GND	P	Ground
8	SCL	I	serial interface clock
9	GND	P	Ground
10	SDA	I/O	Serial data input
11	GND	P	Ground
12	RS	I	Display data/command selection pin
13	GND	P	Ground
14	REST	I	Reset signal
15	GND	P	Ground
16	IOVCC	P	Power supply
17	VCI	P	Power supply
18	GND	P	Ground

7-3 Timing Characteristics

7.4.2 Serial Interface Characteristics (3-line serial):

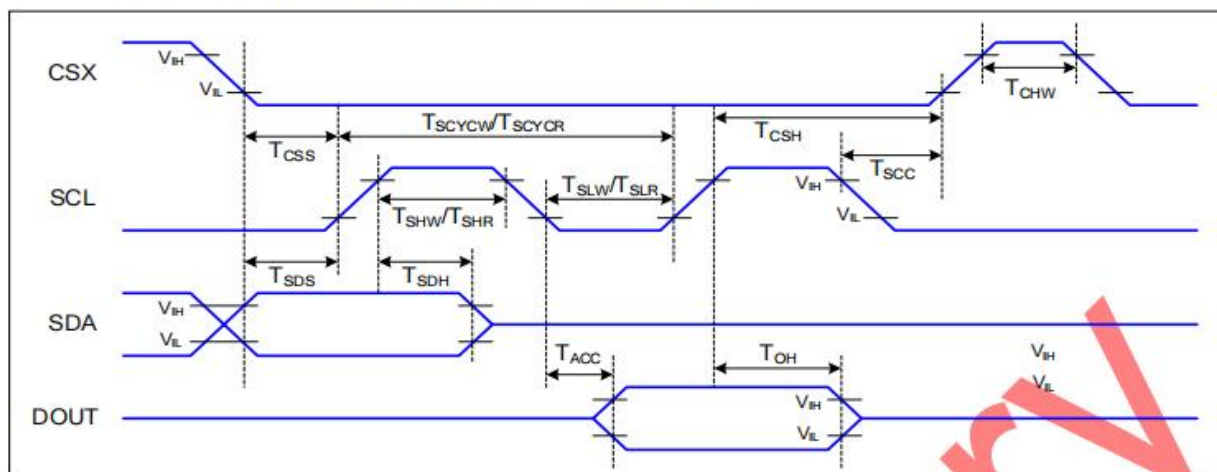


Figure 4 3-line serial Interface Timing Characteristics

$V_{DDI}=1.65$ to $3.3V$, $V_{DD}=2.4$ to $3.3V$, $AGND=DGND=0V$, $T_a=25^{\circ}C$

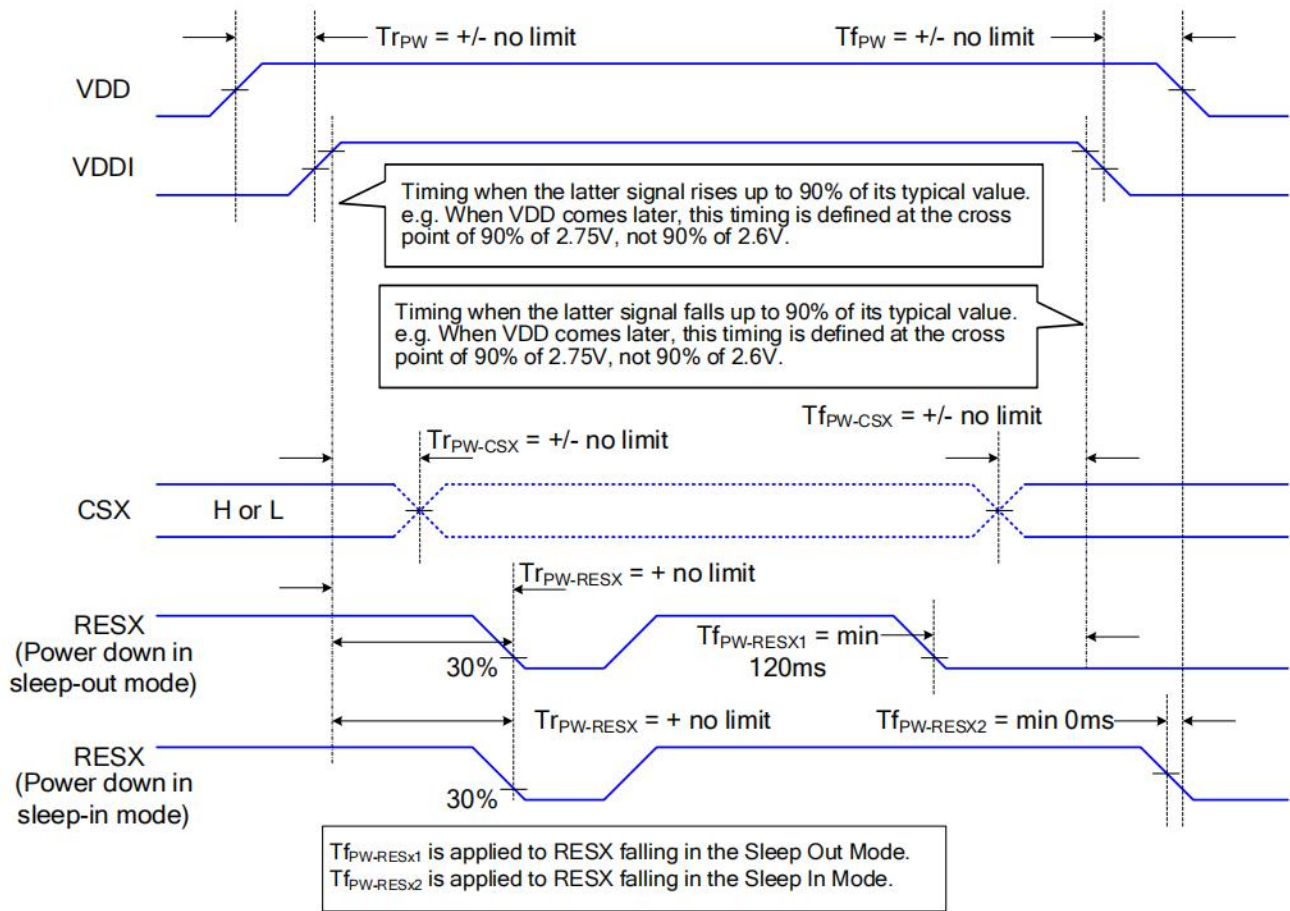
Signal	Symbol	Parameter	Min	Max	Unit	Description
CSX	T_{CSS}	Chip select setup time (write)	TBD	-	ns	
	T_{CSH}	Chip select hold time (write)	TBD	-	ns	
	T_{CSS}	Chip select setup time (read)	TBD	-	ns	
	T_{SCC}	Chip select hold time (read)	TBD	-	ns	
	T_{CHW}	Chip select "H" pulse width	TBD	-	ns	
SCL	T_{SCYCW}	Serial clock cycle (Write)	TBD	-	ns	
	T_{SHW}	SCL "H" pulse width (Write)	TBD	-	ns	
	T_{SLW}	SCL "L" pulse width (Write)	TBD	-	ns	
	T_{SCYCR}	Serial clock cycle (Read)	TBD	-	ns	
	T_{SHR}	SCL "H" pulse width (Read)	TBD	-	ns	
	T_{SLR}	SCL "L" pulse width (Read)	TBD	-	ns	
SDA (DIN)	T_{SDS}	Data setup time	TBD	-	ns	
	T_{SDH}	Data hold time	TBD	-	ns	
DOUT	T_{ACC}	Access time	TBD	TBD	ns	For maximum $CL=30pF$
	T_{OH}	Output disable time	TBD	TBD	ns	For minimum $CL=8pF$

Table 5 3-line serial Interface Characteristics

Note 1 : The rising time and falling time (T_r , T_f) of input signal are specified at 15 ns or less. Logic high and low levels are specified as 30% and 70% of V_{DDI} for Input signals.

Note 2 : In the read sequence of Serial interface, the 500nsec delay time is needed between read command and first read clock.

The power on/off sequence is illustrated below



8. Electro-Optical Characteristics

Item		Symbol	Condition	Min.	Typ.	Max.	Unit	Remark
Response time		Tr +Tf	$\theta_x = \theta_y = 0$	---	30	35	ms	Note 1
Contrast Ratio		CR		500	800	---	---	Note 2
Transmittance		T%		2.0	3.5	---	%	
Color Chromaticity (CIE1931)	White	W x	$\theta_x = \theta_y = 0$	---	0.303	---	---	
		W y		---	0.324	---	---	
Viewing angle	θ_T		CR > 10	---	80	---	Deg.	Note 3
	θ_B			---	80	---		
	θ_L			---	80	---		
	θ_R			---	80	---		

Note1. Measuring Condition

- (1) Measuring surrounding: dark room
- (2) Ambient temperature: Ta=25℃
- (3) 15min. warm-up time

Note2. Response time is the time required for the display to transition from Black to White (Rise Time, Tr) and from White to Black (Decay Time, Tf). The measurement instrument is DMS-803. For more information, please refer to FIG 1 and FIG 2.

Note3. Contrast Ratio (CR) is defined mathematically as below. Measured at the center point of panel by DMS-803, please refer to FIG 1

$$\text{Contrast Ratio} = \frac{\text{Surface Luminance with all white pixels}}{\text{Surface Luminance with all black pixels}}$$

Note4. Viewing angle is the angle at which the contrast ratio is greater than 10(CR≥10:1). The measurement instrument is DMS-803. For more information, please refer to FIG 1 and FIG 3.

Note5. CIE (x, y) chromaticity for CF only, measured with Olympus MHL-450 under C light.

FIG. 1 DMS-803 Measurement Set-Up

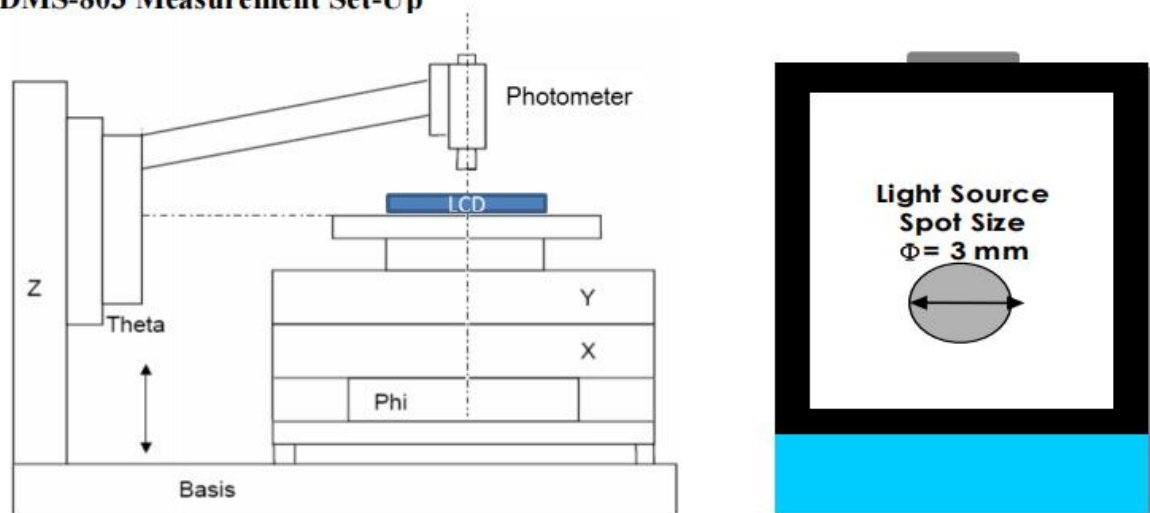
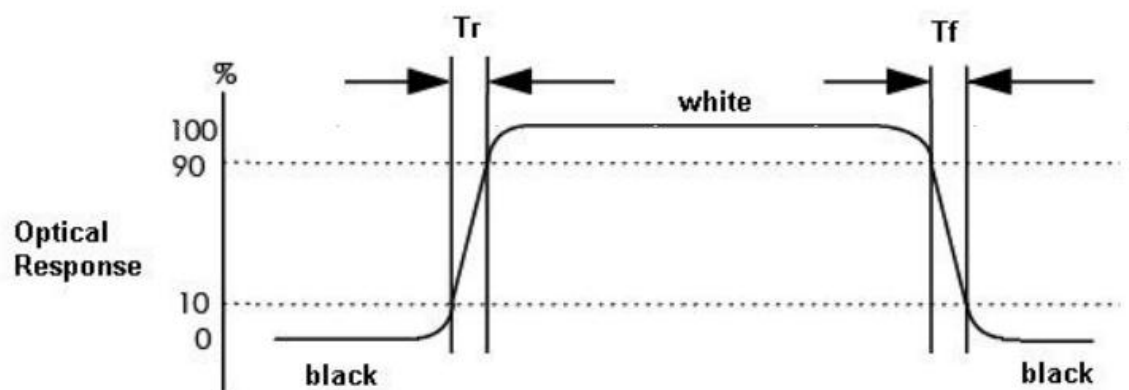


FIG. 2 The definition of Response Time

The response time is defined as the following figure and shall be measured by switching the input signal for “black” and “white”. This definition is valid for a normally black display. For a normally white display the opposite definition applies.



Note(4) Backlight circuit

LED CIRCUIT DIAGRAM



驱动条件： $I_F=40\text{mA}$, $V_f=3\text{V}$ (TYP)

9. Inspection Standards

1. AQL(Acceptable Quality Level)

AQL of major and minor defect

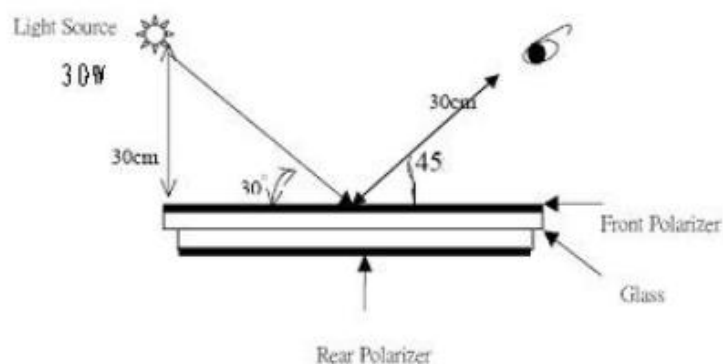
According to GB/T 2828-2003 ; , normal inspection, Class II

MAJOR DEFECT	MINOR DEFECT
0.65	1.5

2. Basic conditions for inspection

The LCM face to us, in normal environment, About an angle of incidence 30°, a distance of 30cm with normal eye, with an angle of 45 degree to check the products without uncovering the film!

(As shown below)

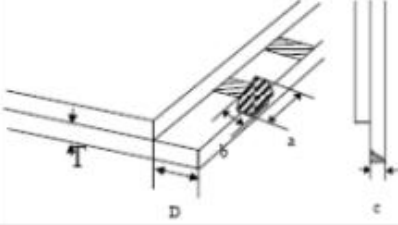
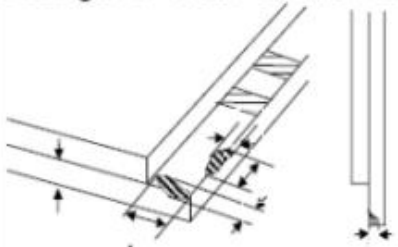



3. Inspection item and criteria

3.1 Visual inspection criterion in immobility




3.1.1 Glass defect

No	Defect item	Criteria	Remark
1	Dimension Unconformity (Major defect)	By Engineering Drawing	

No	Defect item	Criteria	Remark
2	Cracks (Major defect)	1.Linear cracks on panel 【 Reject】 2. Nonlinear crack contrast by limited sample	
3	Glass extrude the conductive area (minor defect)	a: disregards and no influence assemblage 1) $b \leq 1/3$ Pin width(non bonding area) 【 Accept】 2) bonding area $\leq 0.5\text{mm}$ 【 Accept】	a:Length, b:Width
4	Pin-side , conductive area damaged (minor defect)	(a c : disregards) $b \leq 1/3$ of effective length for bonding electrode 【 Accept】	a : Length · b : Width · c : Thickness 
5	Pin-side , non-conductive area damaged (minor defect)	1) Damage area don't touch the ITO (Incluing contraposition mark,except scribing mark) 【 Accept】 2) $c < T$ $b \leq BM$ 1/3 of width 【 Accept】 3) $c = T$ b not touch the seal glue 【 Accept】 4) a disregards	a : Length · b : Width · c : Thickness 

No	Defect item	Criteria	Remark
6	Non-pin-side damage (minor defect)	$c < T$	c : Thickness b : width of damage 
		1) b exceeds 1/3 BM	
		【Reject】	
		$c = T$ b not touch the seal glue 【Reject】	

3.1.2 LCD appearance defect (View area)

No	Defect item	Criteria		Remark
1	Fiber 、glass cratch 、polarizer scratch/folded (minor defect)	Specification	Allowable	note1: L : Length , W : Width note2: disregard if out of AA 
		$0.05\text{mm} < W \leq 0.1\text{mm};$ $L \leq 3.0\text{mm}$	1	
		$W > 0.1\text{mm}; L > 3.0\text{mm}$	0	
2	Polarizer bubble 、 concave and convex (minor defect)	$\psi \leq 0.2\text{mm}$	disregard	note 1: $\psi = (L+W)/2$; L : Length , W : Width note2: disregard if out of AA 
		$0.2\text{mm} < \psi \leq 0.3\text{mm}$	2	
		$0.3\text{mm} < \psi \leq 0.5\text{mm}$	1	
		$0.5\text{mm} < \psi$	0	
3	Black dots 、dirty dots 、 impurities 、eyewinker (Major defect)	$\psi \leq 0.15\text{mm}$	disregard	note2: disregard if out of AA 
		$0.15\text{mm} < \psi \leq 0.25\text{mm}$	2	
		$0.25\text{mm} < \psi \leq 0.3\text{mm}$	1	
		$0.3\text{mm} < \psi$	0	
4	Polarizer prick (Major defect)	$\psi \leq 0.1\text{mm}$	disregard	note1: $\psi = (L+W)/2$; L = Length , W = Width note2: the distance between two dots $> 5\text{mm}$
		$0.1\text{mm} < \psi \leq 0.25\text{mm}$	3	
		$\psi > 0.25\text{mm}$	0	

3.1.3 .FPC


No	Defect item	Criteria		Remark
1	Copper screen peel (Major defect)	Copper screen peel 【 Reject】		
2	No release tape or peel (Major defect)	No release tape or peel 【 Reject】		
3	Dirty dot and impurity of FPC for customer using side (minor defect)	Specification	Allowable	note1: Cannot have stride ITO impurities
		$\psi \leq 0.25\text{mm}$	2	
		$\psi > 0.25$	0	

3.1.4 Black tape & Mara tape

1	FPC or H/S black tape shift (minor defect)	1.shift spec: 1)glue to the polarize 【 Reject】 2) IC bare 【 Reject】 2. left-and-right spec: 1) exceed of FPC edge or H-S edge 【 Reject】 2)IC bare 【 Reject】	
2	No black tape (Major defect)	No black tape 【 Reject】	
3	Tape position mistake (minor defect)	Not by engineering drawing 【 Reject】	
4	Mara tape defect (minor defect)	Peel before pulling the protecting film. 【 Reject】	



3.1.5 Silicon and Tuffy glue

No	Defect item	Criteria	Remark
1	Quantity of silicon (minor defect)	Uncover the ITO and circuit area. 【 Reject】	note: compared by engineering drawing.

No	Defect item	Criteria	Remark
2	Tuffy glue (minor defect)	1. Uncover the reveal copper area 【Reject】 2. Cover layer 0.3mm(Min) ~ 3.0mm(Max) 【accept】	note:if customer has special requirement , refer to the technical document. 
3	Depth of glue covering (minor defect)	Depth of glue covering overtop front Polarizer 【Reject】	Except of the special requirement .

3.2 Electrical criteria

No	Defect item	Criteria	Remark
1	No display (Major defect)	No display 【Reject】	
2	Missing line (Major defect)	Missing line 【Reject】	
3	Seg-com light and dark (Major defect)	Seg-com light and dark 【Reject】	ND filter 2% test
4	No display in immobility (Major defect)	No display in immobility 【Reject】	
5	Flicker of Pattern (Major defect)	Flicker of Pattern 【Reject】	
6	Mura (Major defect)	ND filter 2% test	
7	Over current (Major defect)	Over current 【Reject】	
8	Voltage out of specification (Major defect)	Voltage out of specification 【Reject】	
9	Pattern blur ,error code (Major defect)	Pattern blur ,error code 【Reject】	
10	Dark light, Flicker (Major defect)	Dark light, Flicker 【Reject】	

No	Defect item	Criteria	Remark	
11	Black/White dots · Dirty dots · eyewinker (Major defect)	Specification	Allowable	Note1: disregard if out of AA 
		$\psi \leq 0.15\text{mm}$	disregard	
		$0.15\text{mm} < \psi \leq 0.25\text{mm}$	2	
		$0.25\text{mm} < \psi \leq 0.3\text{mm}$	1	
		$0.3\text{mm} < \psi$	0	
12	Fiber · glass cratch · polarizer scratch/folded (minor defect)	$W \leq 0.03\text{mm}$	disregard	note1: L : Length · W : Width note2: disregard if out of AA 
		$0.03\text{mm} < W \leq 0.05\text{mm} ;$ $L \leq 3.0\text{mm}$	2	
		$0.05\text{mm} < W \leq 0.1\text{mm} ;$ $L \leq 3.0\text{mm}$	1	
		$W > 0.1\text{mm} ; L > 3.0\text{mm}$	0	

10.Records Of Version

Version	Revise Date	Page	Content
00	2026-7-29	ALL	New released